9312

MSI EIGHT-INPUT MULTIPLEXER

A FAIRCHILD COMPATIBLE CURRENT SINKING LOGIC PRODUCT

GENERAL DESCRIPTION — The 9312 is a monolithic, high speed, eight input digital multiplexer circuit. It provides in one package the ability to select one bit of data from up to eight sources. The 9312 can be used as a universal function generator to generate any logic function of four variables. Both assertion and negation outputs are provided. TTμL circuitry with active pullups on the outputs provides high speed, high fanout operation and is compatible with all other members of the CCSL family of digital integrated circuits.

FEATURES

- **MULTIFUNCTION CAPABILITY**
- **25 ns THROUGH DELAY**
- **ON-CHIP SELECT LOGIC DECODING**
- **FULLY BUFFERED COMPLEMENTARY OUTPUTS**
- **THE INPUT/OUTPUT CHARACTERISTICS PROVIDE EASY INTERFACING WITH FAIRCHILD DTμL, LPDTμL, TTμL, AND MSI FAMILIES (CCSL).**
- **INPUT CLAMP DIODES LIMIT HIGH SPEED TERMINATION EFFECTS.**

ABSOLUTE MAXIMUM RATINGS (above which the useful life may be impaired)

Storage Temperature	−65°C to +150°C
Temperature (Ambient) Under Bias	−55°C to +125°C
V_{CC} Pin Potential to Ground Pin	−0.5 V to +7 V
Voltage applied to output when output is high	0 V to +V_{CC} value
Input Voltage (DC) (See Note 1)	−0.5 V to +5.5 V
Input Current (DC) (See Note 1)	−30 mA to +5 mA
Current into output when output is low	+30 mA

Note 1: Either Input Voltage limit or Input Current limit is sufficient to protect the inputs.

ORDER INFORMATION — Specify U6B9312XXX for 16-pin Dual In-Line package or U3L9312XXX for 16-pin Flatpak, where XXX is 51X for the −55°C to +125°C temperature range, or 59X for the 0°C to +75°C temperature range.

LOGIC SYMBOL



V_{CC} = PIN 16
GND = PIN 8

Fig. 1

DUAL IN-LINE PACKAGE

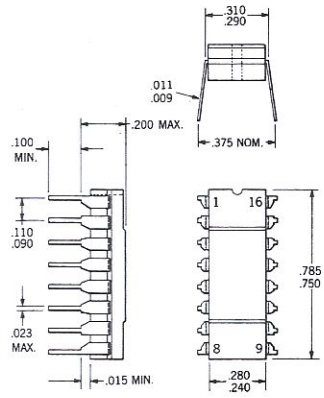

NOTE :
Leads are intended for insertion in hole rows on .300" centers. They are purposely shipped with "positive" (.375) misalignment to facilitate insertion.

Fig. 2

FLAT PACKAGE

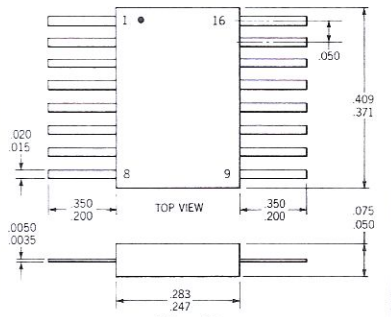

Fig. 3

313 FAIRCHILD DRIVE, MOUNTAIN VIEW, CALIFORNIA, (415) 962-5011, TWX: 910-379-6435

FAIRCHILD SEMICONDUCTOR
A DIVISION OF FAIRCHILD CAMERA AND INSTRUMENT CORPORATION

COPYRIGHT FAIRCHILD SEMICONDUCTOR 1968 • PRINTED IN U.S.A. 41-BR-0049-78 35M
MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U. S. PATENTS: 2981877, 3015048, 3025589, 3064167, 3108359, 3117260; OTHER PATENTS PENDING.

FUNCTIONAL DESCRIPTION — The 9312 is a logical implementation of a single pole - 8 position switch with the switch position controlled by the state of three select inputs, S_0, S_1, S_2. Both assertion and negation outputs are provided. The enable input (E) is active low. When it is not activated the negation output is high and the assertion output is low regardless of all other inputs. The logic function provided at the output is:

$$Z = E \cdot (I_0 \cdot \overline{S}_0 \cdot \overline{S}_1 \cdot \overline{S}_2 + I_1 \cdot S_0 \cdot \overline{S}_1 \cdot \overline{S}_2 + I_2 \cdot \overline{S}_0 \cdot S_1 \cdot \overline{S}_2 + I_3 \cdot S_0 \cdot S_1 \cdot \overline{S}_2 + I_4 \cdot \overline{S}_0 \cdot \overline{S}_1 \cdot S_2 + I_5 \cdot S_0 \cdot \overline{S}_1 \cdot S_2 + I_6 \cdot \overline{S}_0 \cdot S_1 \cdot S_2 + I_7 \cdot S_0 \cdot S_1 \cdot S_2).$$

The 9312 provides the ability, in one package, to select from eight sources of data or control information. By proper manipulation of the inputs, the 9312 can provide any logic function of four variables and its negation. Thus any number of random topic elements used to generate unusual truth tables can be replaced by one 9312.

TRUTH TABLE

E	S_2	S_1	S_0	I_0	I_1	I_2	I_3	I_4	I_5	I_6	I_7	$\overline{Z}$	Z
H	X	X	X	X	X	X	X	X	X	X	X	H	L
L	L	L	L	L	X	X	X	X	X	X	X	H	L
L	L	L	L	H	X	X	X	X	X	X	X	L	H
L	L	L	H	X	L	X	X	X	X	X	X	H	L
L	L	L	H	X	H	X	X	X	X	X	X	L	H
L	L	H	L	X	X	L	X	X	X	X	X	H	L
L	L	H	L	X	X	H	X	X	X	X	X	L	H
L	L	H	H	X	X	X	L	X	X	X	X	H	L
L	L	H	H	X	X	X	H	X	X	X	X	L	H
L	H	L	L	X	X	X	X	L	X	X	X	H	L
L	H	L	L	X	X	X	X	H	X	X	X	L	H
L	H	L	H	X	X	X	X	X	L	X	X	H	L
L	H	L	H	X	X	X	X	X	H	X	X	L	H
L	H	H	L	X	X	X	X	X	X	L	X	H	L
L	H	H	L	X	X	X	X	X	X	H	X	L	H
L	H	H	H	X	X	X	X	X	X	X	L	H	L
L	H	H	H	X	X	X	X	X	X	X	H	L	H

H = High voltage level
L = Low voltage level
X = Level does not affect output

Fig. 5

LOADING RULES

INPUTS	LOADING
All Inputs	1 U.L.

OUTPUTS	FAN-OUT	
	High State	Low State
$\overline{Z}$	18	9
Z	20	10

Fig. 4

1 U.L. = 1 TTμL Unit Load
1 U.L. is defined by the entries I_R and I_F in the table on page 3.

TYPICAL INPUT AND OUTPUT CHARACTERISTICS

EQUIVALENT INPUT CIRCUIT



OUTPUT HIGH EQUIVALENT CIRCUIT



OUTPUT LOW EQUIVALENT CIRCUIT



INPUT CURRENT VERSUS INPUT VOLTAGE



Fig. 6

OUTPUT CURRENT VERSUS OUTPUT VOLTAGE (OUTPUT HIGH)

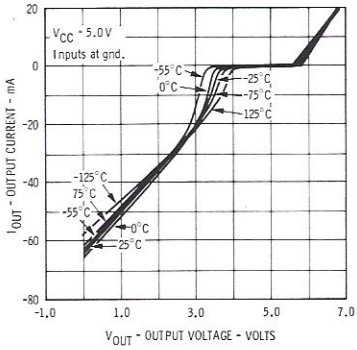

Fig. 7

OUTPUT CURRENT VERSUS OUTPUT VOLTAGE (OUTPUT LOW)



Fig. 8

ELECTRICAL CHARACTERISTICS* ($T_A = -55°C$ to $+125°C$, $V_{CC} = 5.0\ V \pm 10\%$) (Part No. UXX931251X)

SYMBOL	CHARACTERISTICS	LIMITS −55°C MIN.	LIMITS −55°C MAX.	LIMITS +25°C MIN.	LIMITS +25°C TYP.	LIMITS +25°C MAX.	LIMITS +125°C MIN.	LIMITS +125°C MAX.	UNITS	CONDITIONS
V_{OH}	Output High Voltage	2.4		2.4	2.7		2.4		Volts	$V_{CC} = 4.5\ V$ $I_{OH} = -1.2\ mA$ (Pin 15) $V_{CC} = 4.5\ V$ $I_{OH} = -1.08\ mA$ (Pin 14) Inputs at threshold voltages (V_{IL} or V_{IH}) as per truth table
V_{OL}	Output Low Voltage		0.4		0.21	0.4		0.4	Volts	$V_{CC} = 5.5\ V$ $I_{OL} = 16.0\ mA$ (Pin 15) $I_{OL} = 14.4\ mA$ (Pin 14) $V_{CC} = 4.5\ V$ $I_{OL} = 12.4\ mA$ (Pin 15) $I_{OL} = 11.2\ mA$ (Pin 14) Inputs at threshold voltages (V_{IL} or V_{IH}) as per truth table
V_{IH}	Input High Voltage	2.0		1.7			1.4		Volts	Guaranteed input high threshold for all inputs
V_{IL}	Input Low Voltage		0.8			0.9		0.8	Volts	Guaranteed input low threshold for all inputs
I_F (all inputs)	Input Load Current		−1.6		−1.1	−1.6		−1.6	mA	$V_{CC} = 5.5\ V$ $V_F = 0.4\ V$
			−1.24		−0.85	−1.24		−1.24	mA	$V_{CC} = 4.5\ V$ Input Selected
I_R (all inputs)	Input Leakage Current				15	60		60	μA	$V_{CC} = 5.5\ V$ $V_R = 4.5\ V$ Input not selected
I_{PDH}	V_{CC} Current		40		27	40		40	mA	$V_{CC} = 5.0\ V$
t_{pd+} (S_0 to Z)	Switching Speed				23	34			ns	$V_{CC} = 5.0\ V$, See Page 4
t_{pd-} (S_0 to Z)	Switching Speed				25	36			ns	$C_L = 15\ pF$

***Pulse tested**

ELECTRICAL CHARACTERISTICS* ($T_A = 0°C$ to $+75°C$, $V_{CC} = 5.0\ V \pm 5\%$) (Part No. UXX931259X)

SYMBOL	CHARACTERISTICS	LIMITS 0°C MIN.	LIMITS 0°C MAX.	LIMITS +25°C MIN.	LIMITS +25°C TYP.	LIMITS +25°C MAX.	LIMITS +75°C MIN.	LIMITS +75°C MAX.	UNITS	CONDITIONS
V_{OH}	Output High Voltage	2.4		2.4	3.0		2.4		Volts	$V_{CC} = 4.75\ V$ $I_{OH} = -1.2\ mA$ (Pin 15) $V_{CC} = 4.75\ V$ $I_{OH} = -1.08\ mA$ (Pin 14) Inputs at threshold voltages (V_{IL} or V_{IH}) as per truth table
V_{OL}	Output Low Voltage		0.45		0.21	0.45		0.45	Volts	$V_{CC} = 5.25\ V$ $I_{OL} = 16.0\ mA$ (Pin 15) $I_{OL} = 14.4\ mA$ (Pin 14) $V_{CC} = 4.75\ V$ $I_{OL} = 14.1\ mA$ (Pin 15) $I_{OL} = 12.7\ mA$ (Pin 14) Inputs at threshold voltages (V_{IL} or V_{IH}) as per truth table
V_{IH}	Input High Voltage	1.9		1.8			1.6		Volts	Guaranteed input high threshold for all inputs
V_{IL}	Input Low Voltage		0.85			0.85		0.85	Volts	Guaranteed input low threshold for all inputs
I_F (all inputs)	Input Load Current		−1.6		−1.0	−1.6		−1.6	mA	$V_{CC} = 5.25\ V$ $V_F = 0.45\ V$
			−1.41		−0.91	−1.41		−1.41	mA	$V_{CC} = 4.75\ V$ Input Selected
I_R (all inputs)	Input Leakage Current				15	60		60	μA	$V_{CC} = 5.25\ V$ $V_R = 4.5\ V$ Input not selected
I_{PDH}	V_{CC} Current		43		27	43		43	mA	$V_{CC} = 5.0\ V$
t_{pd+} (S_0 to Z)	Switching Speed				23	34			ns	$V_{CC} = 5.0\ V$, See Page 4
t_{pd-} (S_0 to Z)	Switching Speed				25	36			ns	$C_L = 15\ pF$

***Pulse tested**

A. C. CHARACTERISTICS

A.C. CHARACTERISTICS

All measurements are made with $V_{CC} = 5.0$ V applied to pin 16 and with pin 8 grounded. The active input is driven by a 9002 TTμL gate with the output loaded with 15 pF. Both outputs of the 9312 are loaded with 15 pF.

t_{pd}: S_0 to Z

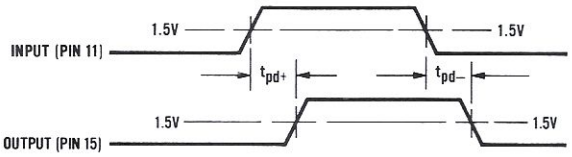

Other Conditions: Pins 1, 8, 10, 12, 13 = Gnd
Pin 2 = V_{CC} through 1.0 kΩ
Pin 16 = V_{CC}

t_{pd}: I_0 to $\overline{Z}$

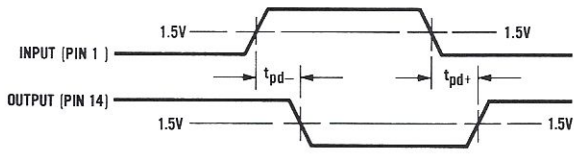

Other Conditions: Pins 8, 10, 11, 12, 13 = Gnd
Pin 16 = V_{CC}

TURN OFF DELAY VERSUS AMBIENT TEMPERATURE; S_0 to Z



Fig. 9

TURN ON DELAY VERSUS AMBIENT TEMPERATURE; S_0 to Z



Fig. 10

TURN OFF DELAY VERSUS AMBIENT TEMPERATURE; I_0 to $\overline{Z}$



Fig. 11

TURN ON DELAY VERSUS AMBIENT TEMPERATURE; I_0 to $\overline{Z}$

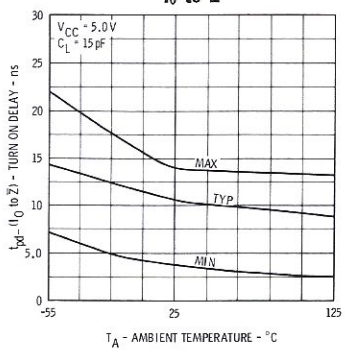

Fig. 12

t_{pd}: S_0 to $\overline{Z}$

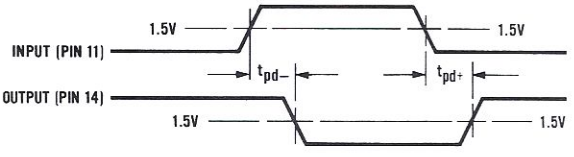

Other Conditions: Pins 1, 8, 10, 12, 13 = Gnd
Pin 2 = V_{CC} through 1.0 kΩ
Pin 16 = V_{CC}

t_{pd}: E to $\overline{Z}$

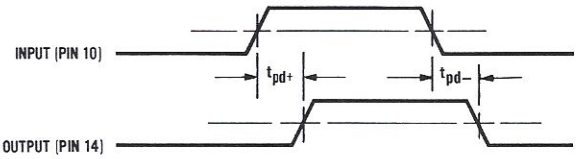

Other Conditions: Pins 8, 11, 12, 13 = Gnd
Pin 1 = V_{CC} through 2.0 kΩ
Pin 16 = V_{CC}

TURN OFF DELAY VERSUS AMBIENT TEMPERATURE; S_0 to $\overline{Z}$



Fig. 13

TURN ON DELAY VERSUS AMBIENT TEMPERATURE; S_0 to $\overline{Z}$



Fig. 14

TURN OFF DELAY VERSUS AMBIENT TEMPERATURE; E to $\overline{Z}$



Fig. 15

TURN ON DELAY VERSUS AMBIENT TEMPERATURE; E to $\overline{Z}$



Fig. 16

APPLICATIONS

A MULTI-PORT MEMORY MODULE

The four bit by eight word multi-port memory module shown in the below diagram uses only thirteen MSI packages; four 9308 24 pin dual four bit latches, eight 9312 eight input multiplexers, and one 9301 one-out-of-ten decoder.

The module as shown is capable of simultaneously reading from two independently specified locations and writing into a third independently selected location. The necessary enables are provided so that a number of these modules may be connected together to produce a larger memory. As an example a sixteen bit by sixty-four word memory would require thirty-two of the modules shown below.

By connecting this type of memory to a function generator unit, a processor could be constructed that would execute three address instructions at a very high speed on the data contained in this type of memory. In order to utilize the speed of the memory the instructions would also have to be contained in fast semiconductor memory.

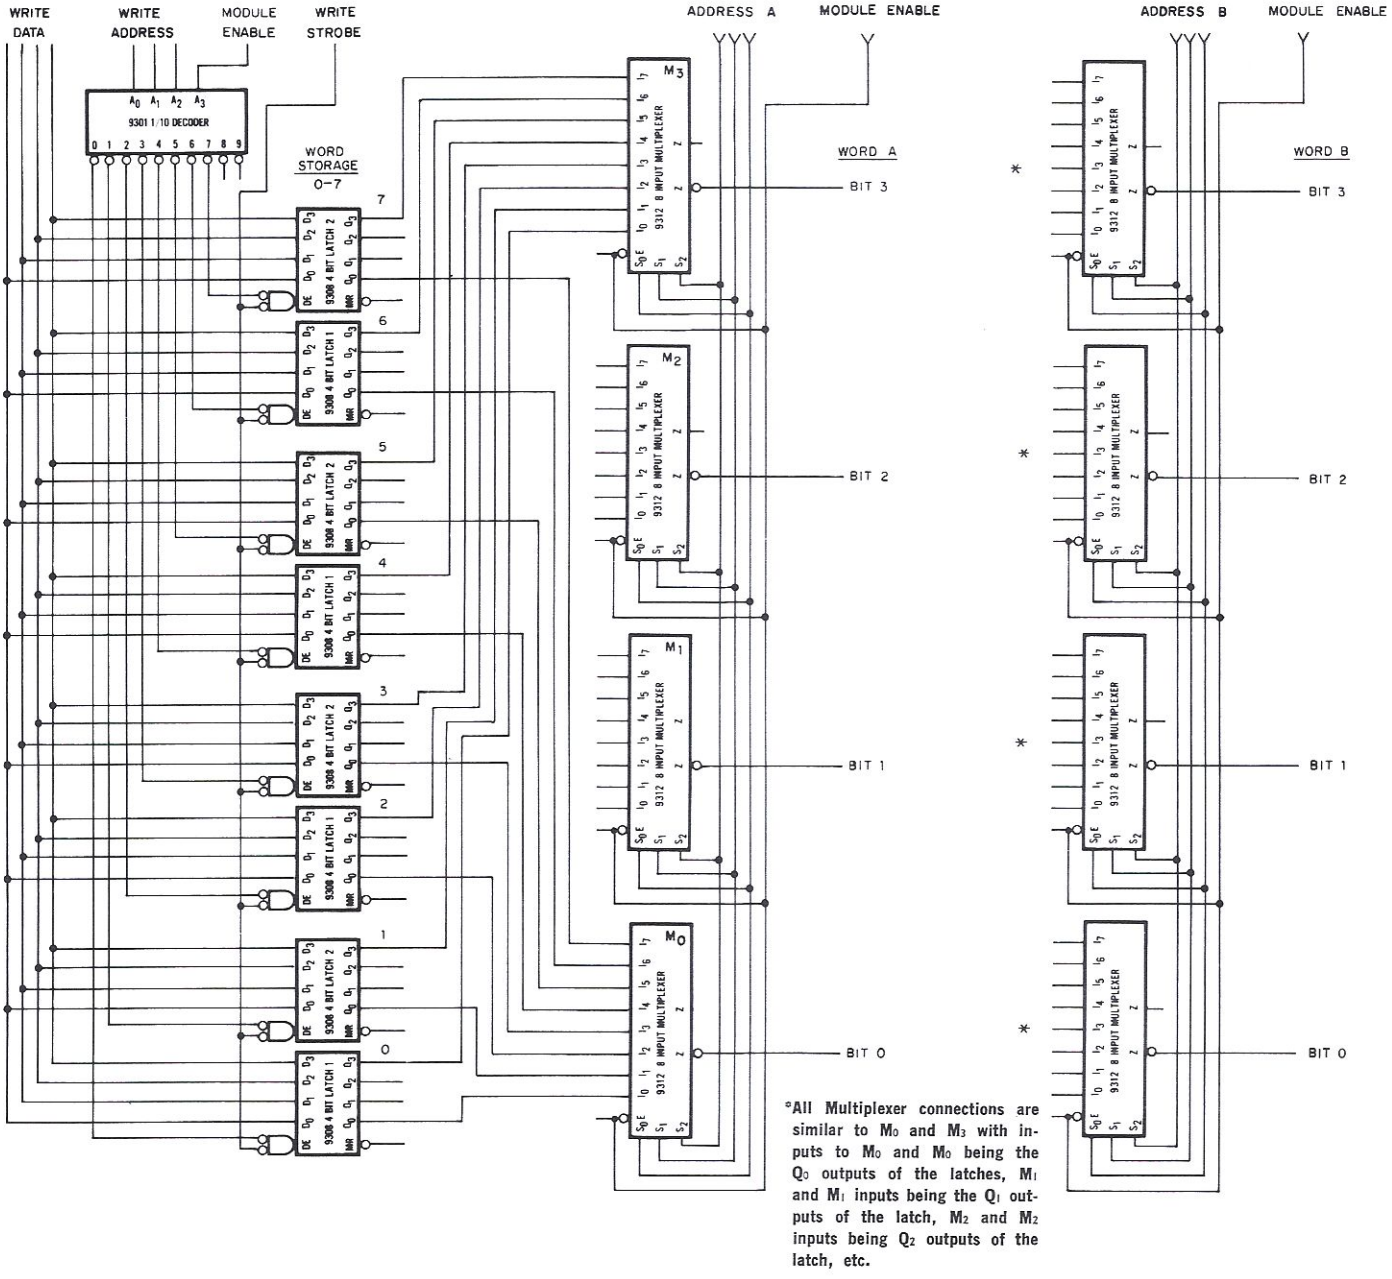

*All Multiplexer connections are similar to M_0 and M_3 with inputs to M_0 and M_0 being the Q_0 outputs of the latches, M_1 and M_1 inputs being the Q_1 outputs of the latch, M_2 and M_2 inputs being Q_2 outputs of the latch, etc.

Fig. 17

APPLICATIONS

3 BIT COMPARATOR

Three bits of data to be compared are supplied to the address and select inputs of the 9301 and 9312 respectively. If A_0, A_1, A_2, and B_0, B_1, B_2 compare, the mutually exclusive active low output of the 9301 1/10 decoder and the selected input of the 9312 multiplexer will be coincidental and COMPARE OUT will be high. The COMPARE ENABLE must be low to permit compare operation.

3 BIT COMPARATOR

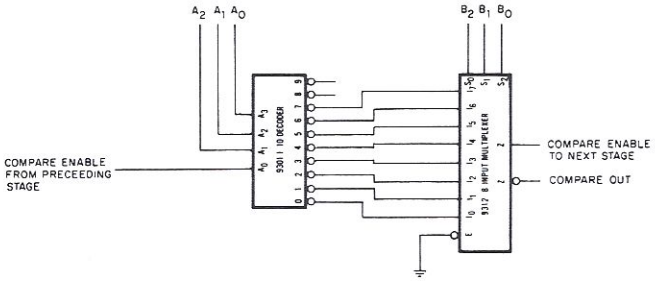

INTERCONNECTION DIAGRAM FOR 9 BITS

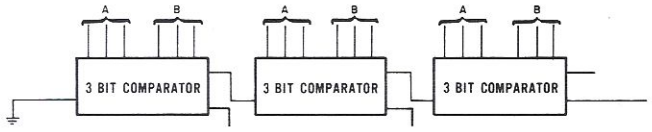

Fig. 18

IMPLEMENTING ANY FOUR-VARIABLE BOOLEAN FUNCTION

The 9312 eight input multiplexer can (in addition to performing its nominal function) produce any Boolean function of four variables without any additional elements if both the assertion and negation of one of the variables are present. If an assertion and negation are not present, one inverter may be required.

The procedure for implementing a four-variable function, along with an example, is shown in the attached diagram. First, consider the function in terms of a Karnaugh map. If the Q_0, Q_1 and Q_2 variable are connected to the S_0, S_1 and S_2 inputs of the 9312 then the Karnaugh map will be split, as shown, into eight sections, with each section corresponding to an input to the 9312. In order to implement the function each input of the 9312 is connected to one of the following four signals: ground, V_{CC}, the assertion, or negation of the fourth variable.

The contents of the two squares associated with an input, on the Karnaugh map, determine which connection is made to that input. If both squares contain a zero, ground should be connected to the input; if both squares contain a one, the input should be connected to V_{CC}. If the two squares contain a one and a zero then either the assertion or negation of the fourth variable will be required to implement the function. If the single one is located in the square associated with the assertion of the fourth variable then the assertion of the assertion of the fourth variable is connected to that input, and vice versa.

Shown in the illustration below is a 9312 decoding the condition of a 9300, producing a one output whenever the register contains two or more transitions. The truth table, Karnaugh map and the connection to the 9312 for this function are also shown in the illustration.

In many applications, using the 9312 to implement general logic functions of four variables will result in a sizeable reduction in package count. In many cases use of the 9312 with additional gates to produce functions of more than four variables will also reduce the package count.

The concept of using the 9312 eight input-multiplexer as a general logic function generator is described by S. S. Yau and C. K. Tang of Northwestern University in a paper presented at the 1968 Spring Joint Computer Conference in Atlantic City, New Jersey.

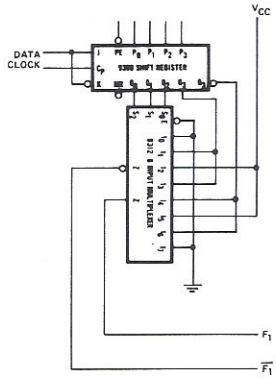

Q_0	Q_1	Q_2	Q_3	F_1
0	0	0	0	0
0	0	0	1	0
0	0	1	0	1
0	0	1	1	0
0	1	0	0	1
0	1	0	1	1
0	1	1	0	1
0	1	1	1	0
1	0	0	0	0
1	0	0	1	1
1	0	1	0	1
1	0	1	1	1
1	1	0	0	0
1	1	0	1	1
1	1	1	0	0
1	1	1	1	0

TRUTH TABLE



KARNAUGH MAP OF FOUR VARIABLE FUNCTION.



MULTIPLEXER INPUT MAP FOR $S_0=Q_0$, $S_1=Q_1$, $S_2=Q_2$

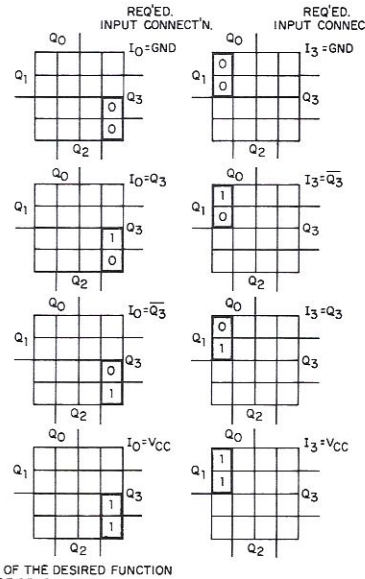

Fig. 19

FROM THE KARNAUGH MAP OF THE DESIRED FUNCTION I_0–I_7 CONNECTIONS CAN BE DETERMINED.

Fairchild cannot assume responsibility for use of any circuitry described other than circuitry entirely embodied in a Fairchild product. No other circuit patent licenses are implied.